


DOUBLE FLEXIBLE JOINT

DESCRIPTION :

WHEN THERE IS ANY POSSIBILITY FOR SOIL SETTLEMENT OF CHAMBERS OR PIPE LINES EIC DOUBLE FLEXIBLE JOINTS ARE USED .

THE CONNECTION PIPE LENGTH CAN BE INCREASED UPON CUSTOMER REQUEST AS THE INCREASE IN CONNECTION PIPE LENGTH INCREASES TH SETELMENT DISTANCE.

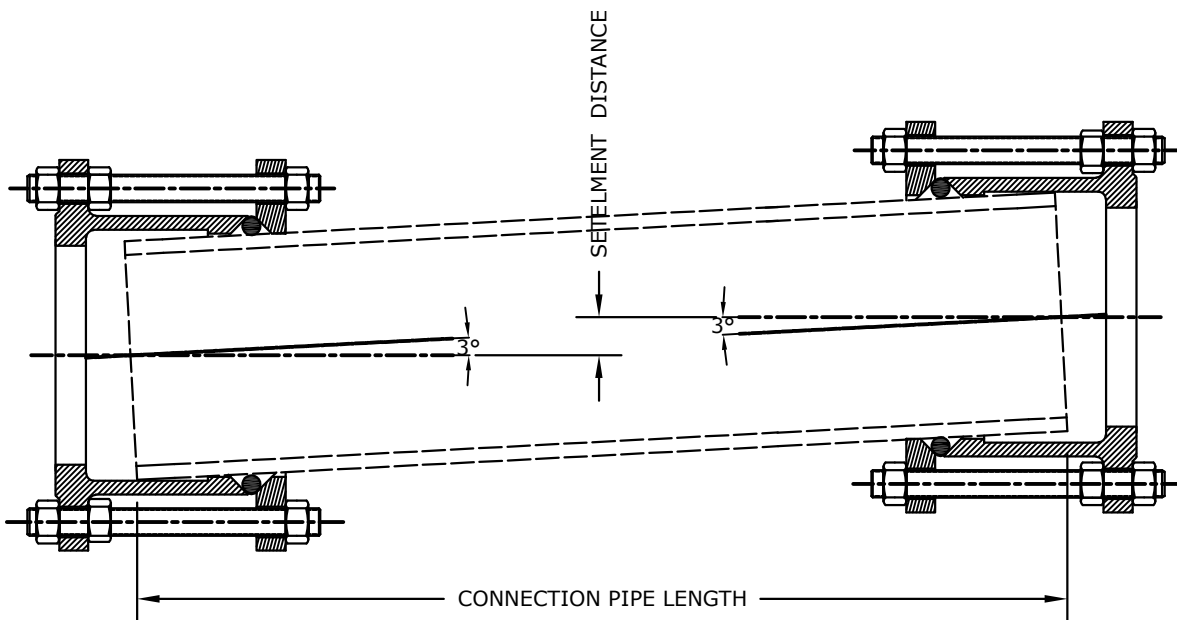

WORKING PRESSURE :10-16 BAR.

TEST PRESSURE :1.5 WORKING PRESSURE.

FLANGE CONNECTIONS ACCORDING TO ISO STANDARDS 2531