

DUCTILE IRON PIPE COUPLINGS


FOR DUCTILE IRON PIPES

DESCRIPTION:

PIPE COUPLINGS ARE USED TO CONNECT TWO PIPES WHEN TWO SPIGOTS MEET . ALSO THESE COUPLINGS ARE USED TO REPAIR PIPES BY CUTTING THE BROKEN PART AND PUTING A NEW PIPE CONNECTING THEM WITH THE COUPLING .

DN	SPIGOT OUTSIDE DIAMETER	L	D	A	STUDS	
					NO.	DIA.
80	98	100	200	16	4	12
100	118	100	220	16	4	12
125	140	100	250	16	4	12
150	170	100	285	16	4	12
200	222	100	340	17	4	12
250	274	100	400	19	6	12
300	326	100	455	20	6	16
350	378	120	505	20	8	16
400	429	120	565	20	8	16
500	532	120	670	22	10	16
600	635	140	780	25	10	16
700	738	140	895	27	12	16
800	842	140	1015	30	12	20
900	945	160	1115	32	12	20
1000	1048	160	1230	35	14	20
1200	1255	160	1455	40	14	20

ALL DIM IN MM

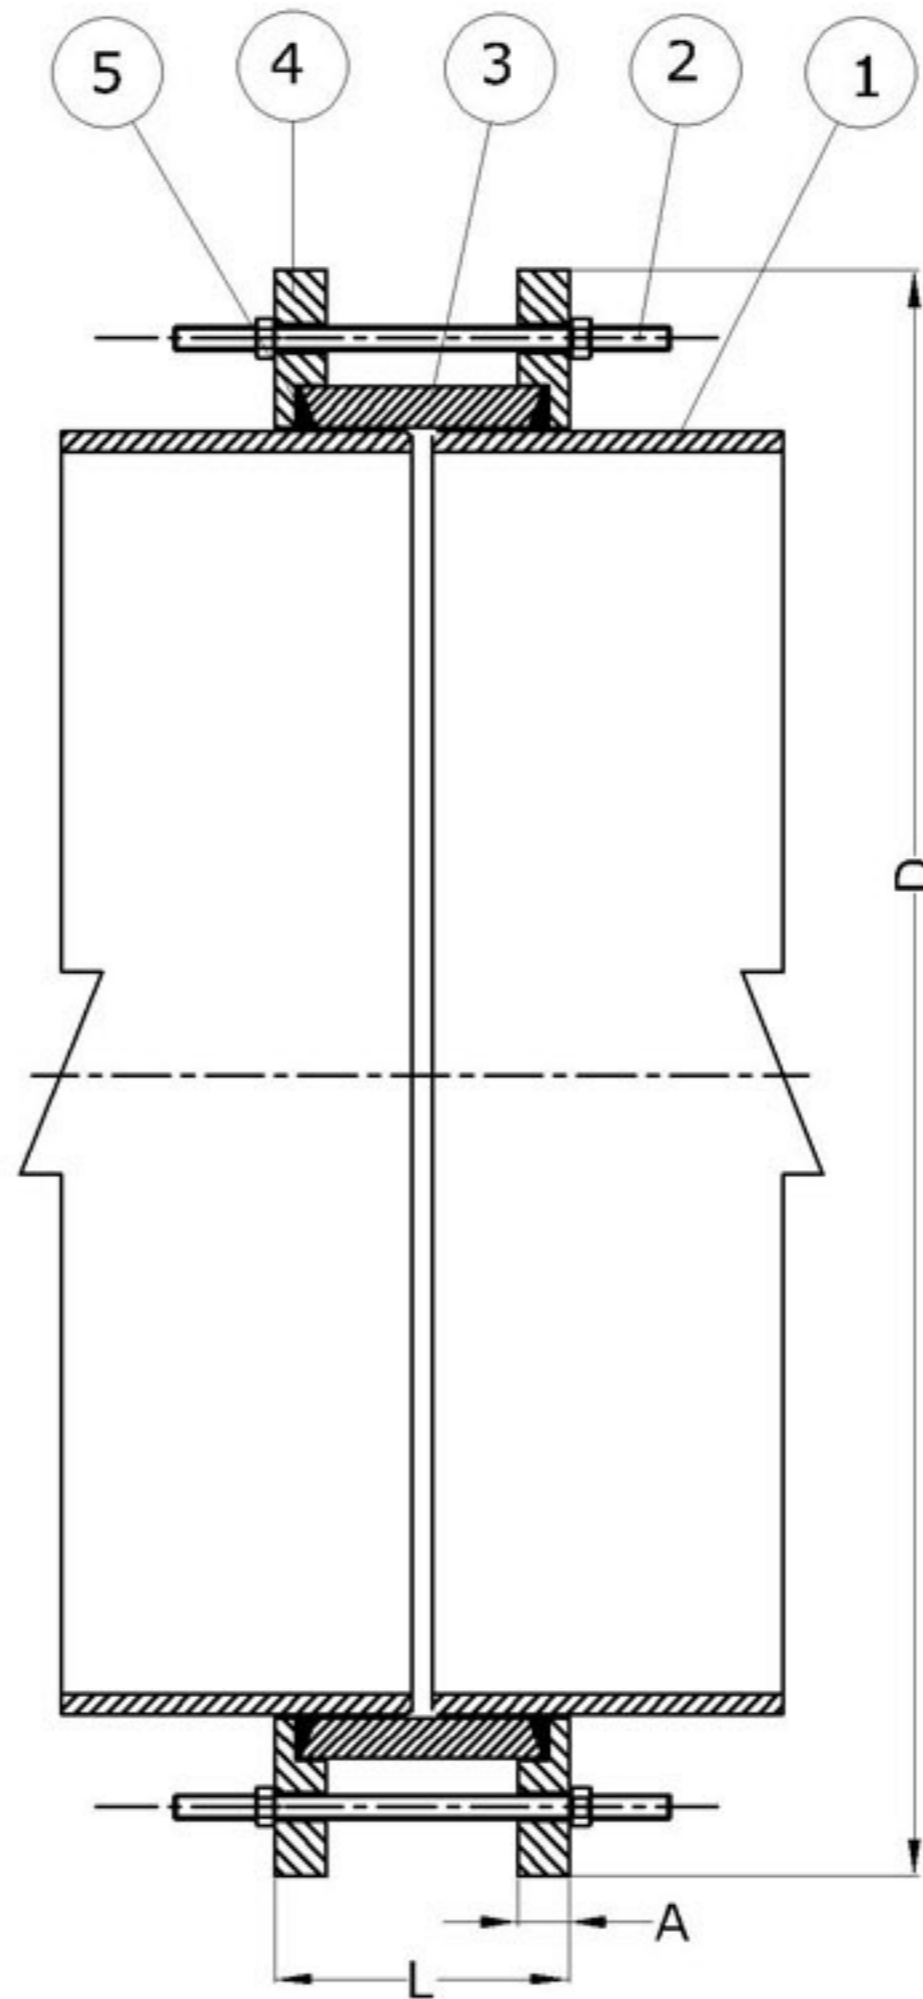

No	DESCRIPTION	Material	STANDARDS
1	MAIN PIPE	DUCTILE IRON	ISO 1083
2	STUD	GALVANIZED STEEL	BS 970
3	SLEEVE PIPE	DCI GGG 50	ISO 1083
4	GASKET FLANGE	D.C.I GGG 50	ISO 1083
5	GASKET	EPDM - NBR Rubber	BS 2494