


NON RETURN TILTING TYPE VALVES

DESCRIPTION :

EIC NON RETURN TILTING TYPE VALVES ARE LIGHT WEIGHT VALVES SUITABLE FOR WATER WORKS
NON RETURN TILTING TYPE VALVES CAN BE FITTED WITH A HYDRAULIC DAMPER TO REDUCE THE
CLOSING TIME AND THUS REDUCING THE WATER HAMMER WAVES.

EIC TILTING NON RETURN VALVES ARE METAL TO RUBBER SEATED TO ENSURE PERFECT SEAL AND
REDUCE THE SLAMING NOISE WHEN CLOSING .

THE RUBBER SEAL IS FITTED ON THE DISC WHICH IS EASY TO REPLACE AND ADJUST IN SITE .
SPINDLES MOVE ON LIFE LUBRICANT BRONZE BEARINGS.

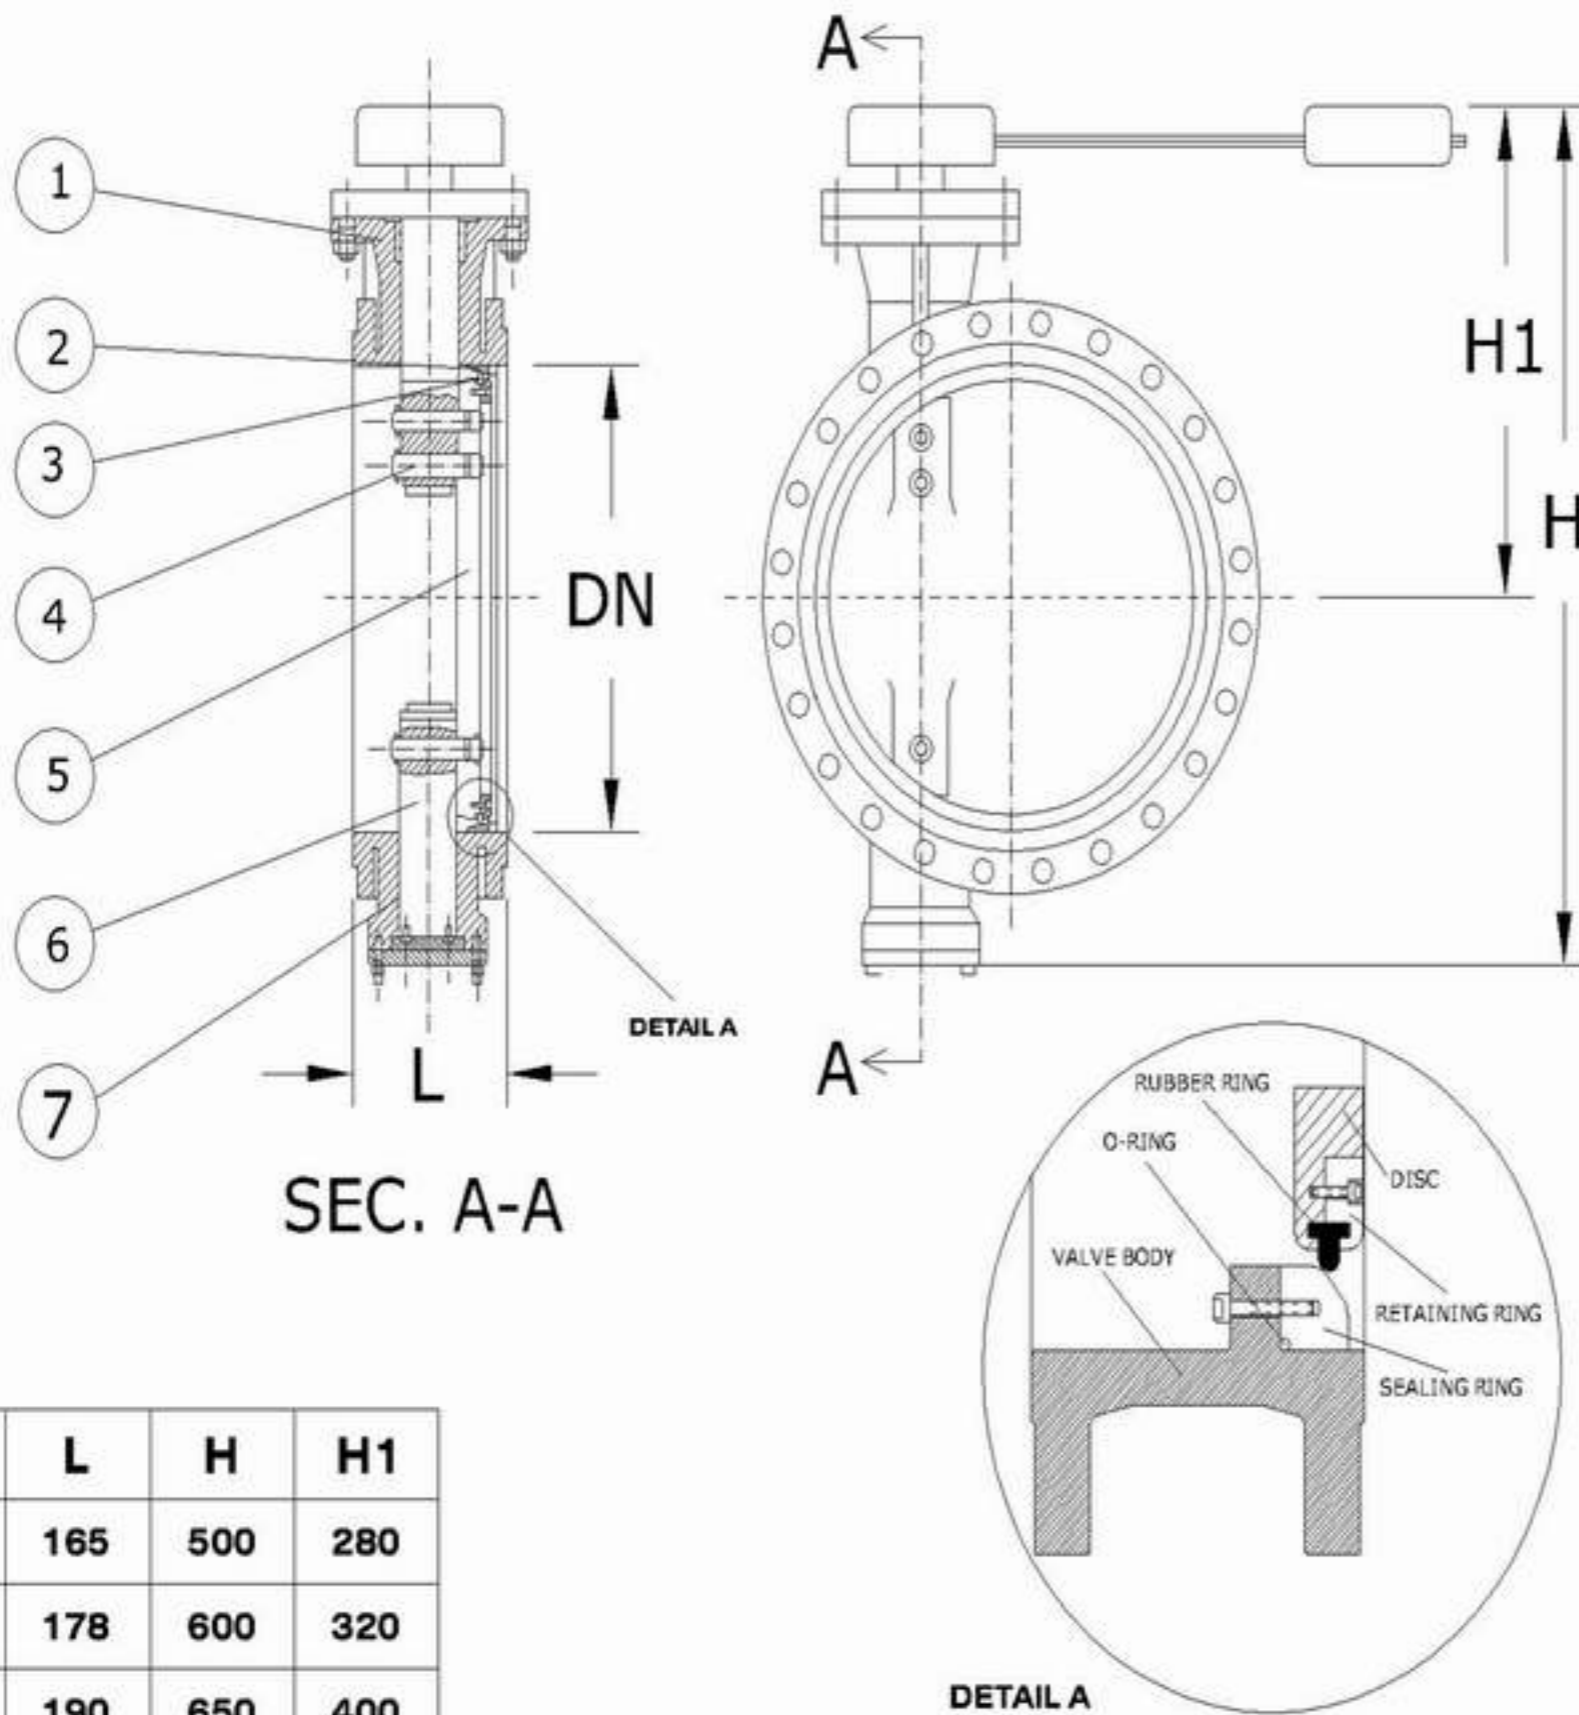

DN	L	H	H1
250	165	500	280
300	178	600	320
350	190	650	400
400	216	740	460
500	229	850	520
600	267	950	630
700	292	1050	695
800	318	1150	750
900	330	1300	865
1000	410	1500	1005
1200	470	1850	1100

ALL DIM IN MM

NO	Description	Material	Standards
1	Body	D.C.I GGG 50	ISO 1083
2	SEALING RING	Stainless Steel	ASTM GRADE 304
3	RUBBER GASKET	NBR-EPDM	BS 2494
4	FIXING PIN	Stainless Steel	ASTM GRADE 304
5	DISC	D.C.I GGG 50	ISO 1083
6	SPINDLE	Stainless Steel	ASTM GRADE 304
7	BEARING	BRONZE	BS 1400

WORKING PRESSURE : 10/16 - 16/25 BAR.

TESTING OF VALVES ACCORDING TO ISO 5208-1992 (E)

FLANGE CONNECTIONS ACCORDING TO ISO STANDARDS 2531

FACE TO FACE DIM ACCORDING TO BS 5155 SHORT
SUITABLE FOR WATER WORKS

THE COMPANY HAS THE RIGHT TO MAKE ANY DESIGN MODIFICATIONS WITHOUT PRIOR NOTICE



GATE VALVE
RISING STEM



GATE VALVE
NON RISING STEM



AIR VALVE



NON RETURN
VALVE



SAFETY VALVE



VERTICAL
FIRE HYDRANT

ENGINEERING INDUSTRIES

For Casting & Machining of Metals