


ANGLE FLOAT VALVE

DESCRIPTION :

EIC BUTTER FLY FLOAT VALVES HAS THE OPTION TO CONTROL THE WATER LEVEL INSIDE THE TANK BY ADJUSTING THE LEVEL OF THE FLOAT OR BY EVEN INVERTING IT TO GAIN ADDITIONAL HIEGHT OF WATER INSIDE THE TANK.

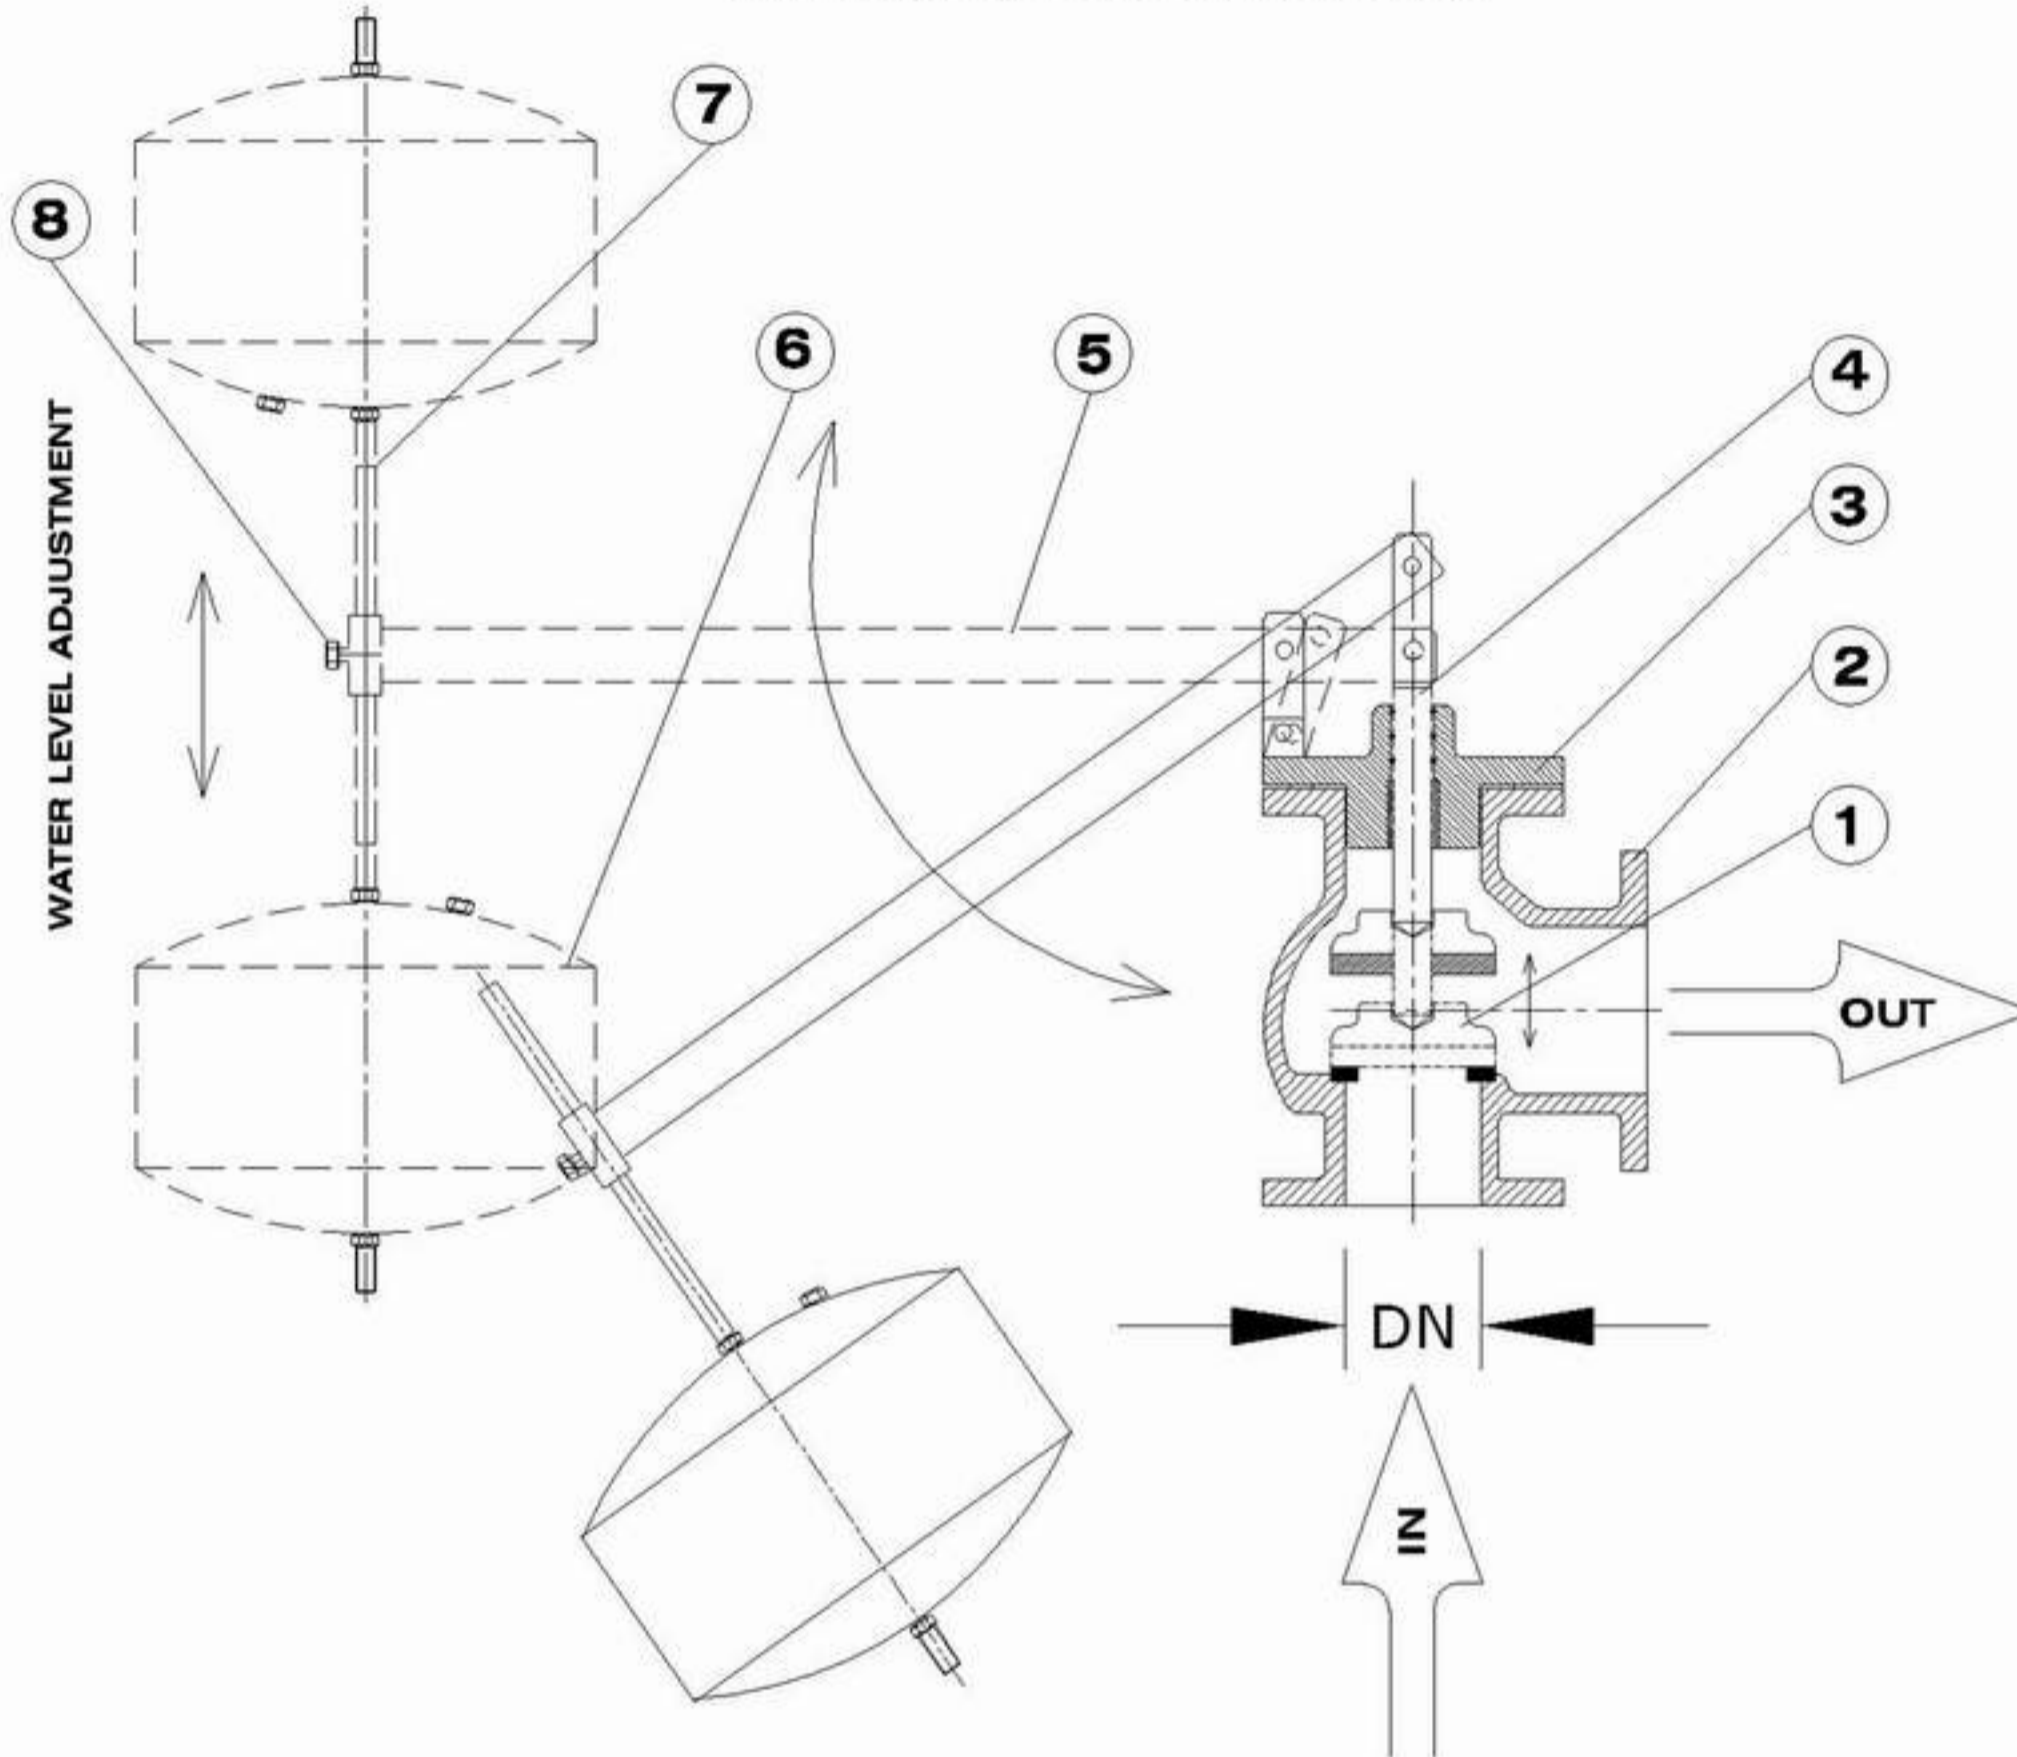

No	DESCRIPTION	MATERIAL	STANDARDS
1	Disc	D.C.I GGG 50	ISO 1083
2	Body	G.C.I GG 25/D.C.I GGG 50	ISO 185 / ISO 1083
3	Flange	D.C.I GGG 50	ISO 1083
4	Spindle	Stainless Steel	ASTM GRADE 304
5	Arm	Stainless Steel	ASTM GRADE 304
6	Float	Stainless Steel	ASTM GRADE 304
7	Float Stem	Stainless Steel	ASTM GRADE 304
8	Adjustment Bolt	Stainless Steel	ASTM GRADE 304

DN	Inlet	Outlet
80	80	100
100	100	125
150	150	200
200	200	250
250	250	300
300	300	350
400	400	450
500	500	500
600	600	600
700	700	700
800	800	800

ALL DIM IN MM

TYPE OF FLOW : ANGLE FLOW

FLOATING BALL AND ARM ARE DESIGNED PROPOTIONALLY ACCORDING TO AVAILABLE SPACE IN STORAGE TANK AND WORKING PRESSURE

FLANGE CONNECTIONS ACCORDING TO ISO STANDARDS 2531



GATE VALVE RISING STEM



GATE VALVE NON RISING STEM



AIR VALVE



NON RETURN VALVE



SAFETY VALVE



VERTICAL FIRE HYDRANT

ENGINEERING INDUSTRIES

For Casting & Machining of Metals